
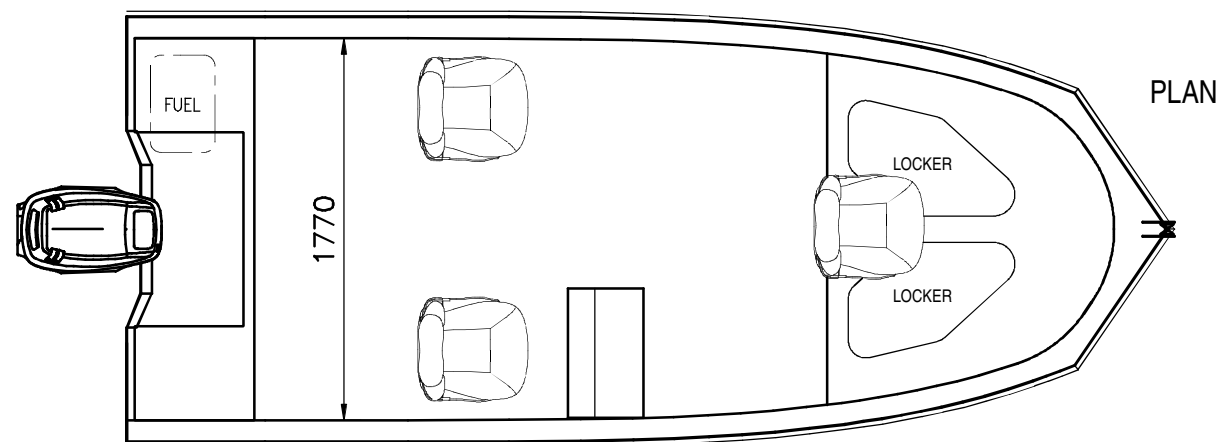


PRINCIPAL PARTICULARS

LOA: 4.85 m (Hull Only)
 BEAM: 2.0 m
 DEPTH: 1.0 m
 DRAFT: 0.26m (HULL)
 D/RISE: 14° @ TRAN.
 DISPL: 450kg DRY -w- 50HP

HULL TO BE FOAM FILLED

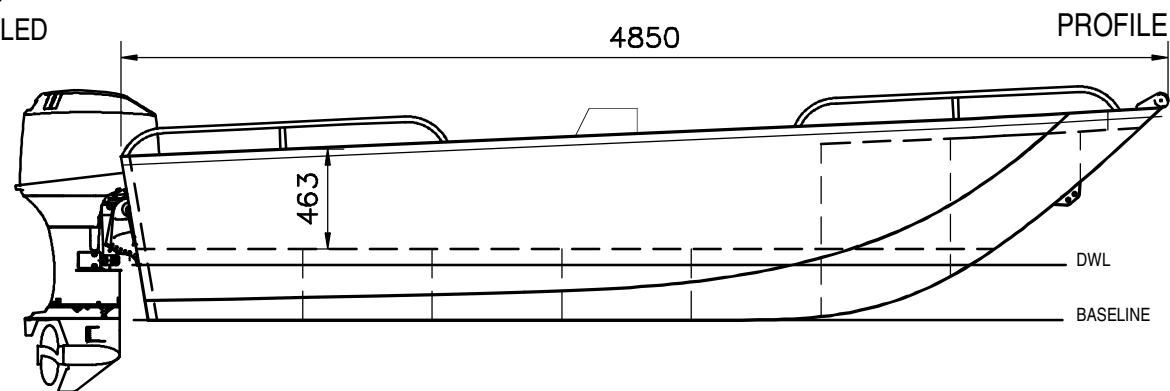

Note: Layout can be customised by owner
 Owner Advised to provide sun protection

4.85m FLY FISHER

GENERAL ARRANGEMENT



AUSTRALIAN BUILDERS PLATE	
BUILDER	-
HIN AU-	-
Max	= 90 hp
	= 140 kg
Max	4 = 360 kg
Max +	= 435 kg
Buoyancy BASIC Flotation	
Alteration of the boat's hull or permanent fittings may invalidate the particulars on this plate. A REDUCTION IN MAXIMUM NUMBER OF PERSONS MUST BE MADE IN ADVERSE WEATHER CONDITIONS OR WHEN ON THE OPEN SEA.	

- Design in compliance with AS1799-1 2009
- Structure in accordance with ISO 12215
- Material:
 - All plating 4mm 5083 aluminium.
 - 12mm Plywood decks.
- Builders plate, Jig, Drawings & Photo CD included with kit.
- Bollards, Inspection port & Drain plug included in the kit.
- 5 days per week helpdesk available
- Customization available.
- Flotation foam & most fit out parts available, check catalogue for pricing.
- HIN number engraved in kit & registered.

ACTUAL KIT MIGHT DIFFER FROM PICTURES SHOWN

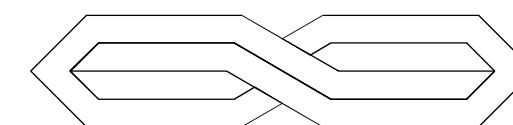


PLATE ALLOY